


AUTO SIDE & TAIL LAMP WITH T10 BULB AND WEDGE BASE W5W 12V 5W

GE2006-8967 Category: W5W Cap: W2.1x9.5d

1. Specification

Regulation / Standard

ECE R37/ W5W
IEC 60061-1 / 7004-91-3
IEC 60809 / 4320-2
IEC 60810
Directive 2000/53/EC (ELV directive)

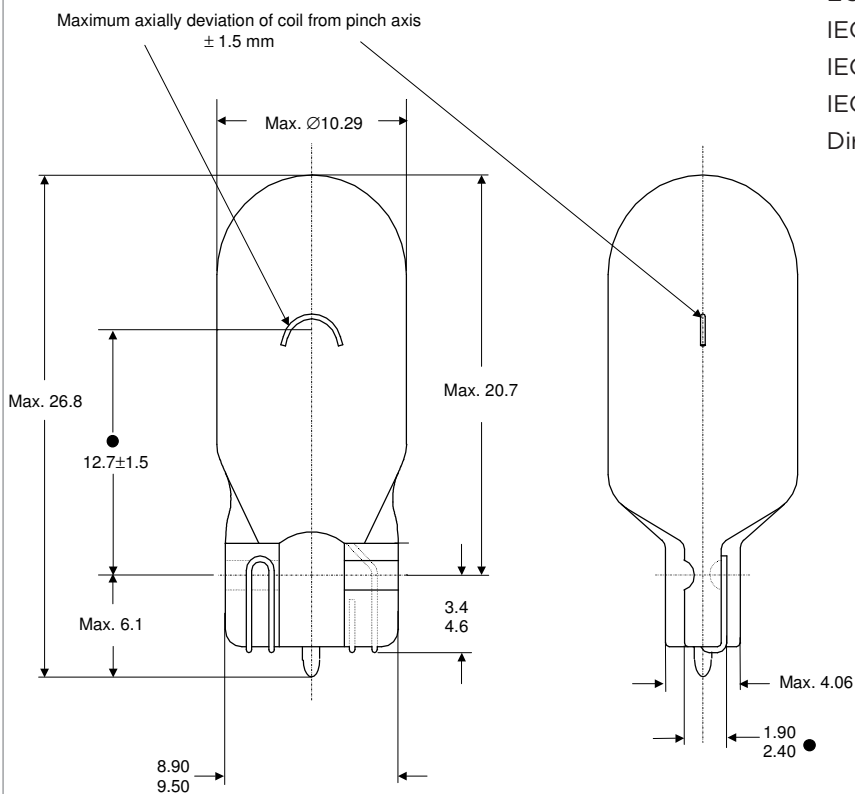

●critical to quality parameter
*To be checked by means of "box system"

Dimensions in mm.

2. Technical Data

Initial Parameters

Test Voltage: 13.5 V
Wattage ●: 4.5 W - 5.5 W
Luminous Flux ●: 40 - 60 Lumens

Life

Test Voltage:	13.5V	13.5V
Test Cycle:	Continuous	90/min flashing
Life:	B ₃ =600 Hours T _c =1000 Hours	B ₃ =1500 Hours T _c =3000 Hours
Lumen Maintenance:	70% at 750 Hours	80% at 750 Hours

Operating Requirements

Operating Position: Universal

AUTO SIDE & TAIL LAMP WITH T10 BULB AND WEDGE BASE W5W 12V 5W

GE2006-8967 Category: W5W Cap: W2.1x9.5d

2. Technical Data continued

Monogramming:

GE 12V W5W F Dt E1 2EC G

GE: Mark
12V: Nominal voltage
W5W: Type
F: Lead Free
Dt: Date (ww/y)
E1: Identification of "E" mark approval
2EC: Approval code
G: Product line code (pictograph)

Stamping text:

GE 12V

W5W F Dt

E1 2EC G

Place of stamping:

On superficie of cap

All other text of monogramming are different as per several specific SKUs.